

iwis® Roller chains

according to DIN 8187-1, ISO 606: 2004 and iwis standard







DIN/ISO no.	Ref. no. iwis	Pitch p (")	Pitch p (mm)	iwis (N) ave.	Norm (N) min.	Bearing area f (cm ²)	Weight per m q (kg/m)	Chain components and connecting links Nos.	b ₁ (mm) min.	b ₂ (mm) max.	g (mm) max.	a ₁ (mm) max. ²⁾	a (mm) max. ²⁾	Roller d ₁ (mm) max.	Pin d ₂ (mm) max.
Simplex															
04	G 42	6 x 2,8 mm	6,00	3.200	3.000	0,07	0,12	2, 3, 7, 8	2,80	4,10	5,00	6,70	7,60	4,00	1,85
05 B-1	G 52	8 mm x 1/8"	8,00	6.000	5.000	0,11	0,18	2, 3, 7, 8	3,16	4,85	7,10	8,10	9,20	5,00	2,31
–	G 53 HZ ¹⁾ ³⁾	8 mm x 3/16"	8,00	8.500	–	0,25	0,34	2, 8	4,76	7,90	7,60	11,70	–	5,00	3,15
–	G 62 1/2 ¹⁾	3/8 x 5/32"	9,525	11.000	–	0,22	0,34	2, 3, 7, 8	3,94	6,63	8,20	11,00	12,20	6,35	3,31
06 B-1	G 67 ¹⁾	3/8 x 7/32"	9,525	10.500	9.000	0,28	0,41	2, 3, 6, 7, 8	5,72	8,53	8,20	12,90	14,10	6,35	3,31
–	P 83 V	1/2 x 3/16"	12,70	15.500	–	0,29	0,44	2, 3, 6, 7, 8	4,88	7,97	10,20	13,20	14,10	7,75	3,68
–	S 84 V	1/2 x 1/4"	12,70	18.000	–	0,38	0,58	2, 3, 6, 7, 8	6,40	9,65	12,00	15,00	16,00	7,75	3,97
08 B-1	L 85 SL*	1/2 x 5/16"	12,70	22.000	18.000	0,50	0,70	2, 3, 6, 7, 8	7,75	11,30	11,80	16,90	18,50	8,51	4,45
10 B-1	M 106 SL*	5/8 x 3/8"	15,875	27.000	22.400	0,67	0,95	2, 3, 6, 7, 8	9,65	13,28	14,40	19,50	20,90	10,16	5,08
12 B-1	M 127 SL*	3/4 x 7/16"	19,05	34.000	29.000	0,89	1,25	2, 3, 4, 6, 7, 8	11,75	15,62	16,40	22,70	23,60	12,07	5,72
16 B-1	M 1611*	1" x 17mm	25,40	75.000	60.000	2,10	2,70	2, 3, 6, 7, 8	17,02	25,45	21,10	36,10	36,90	15,88	8,28
20 B-1	M 2012	1 1/4 x 3/4"	31,75	120.000	95.000	2,92	3,72	2, 4, 6, 8	19,56	29,01	25,40	40,50	46,30	19,05	10,19
24 B-1	M 2416	1 1/2 x 1"	38,10	211.000	160.000	5,50	7,05	2, 4, 6, 8	25,40	37,92	33,50	53,10	60,00	25,40	14,63
28 B-1	M 2819	1 3/4 x 31mm	44,45	250.000	200.000	7,35	8,96	2, 4, 6, 8	30,95	46,58	37,00	63,60	69,90	27,94	15,90
32 B-1	M 3219	2" x 31mm	50,80	315.000	250.000	8,05	10,00	2, 4, 6, 8	30,95	45,57	42,30	65,10	70,10	29,21	17,81

¹⁾ Also available with straight side plates ²⁾ Varying dimensions for cranked links ³⁾ Bush chain

* easy break – chains with shouldered pins

The suffix SL indicates chains with particularly wear-resistant pins.

It should be noted that if cranked links are fitted, the breaking strength of the chain may be reduced by approximately 20%.

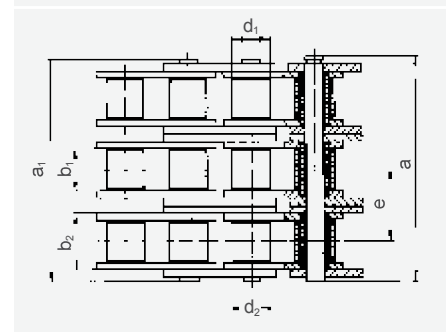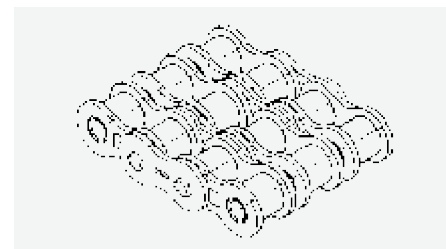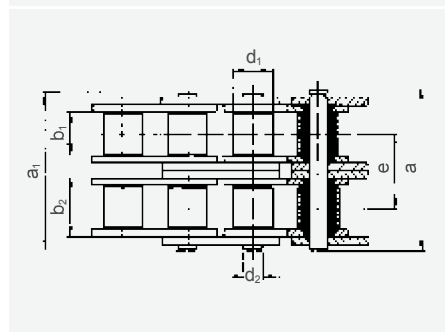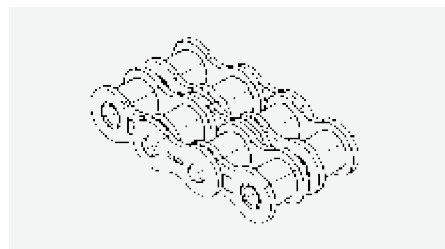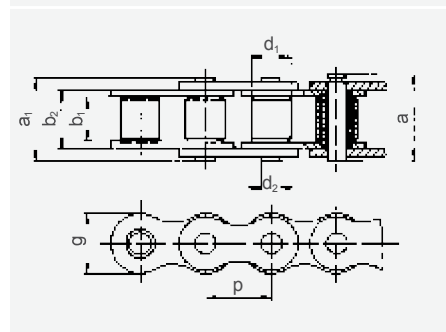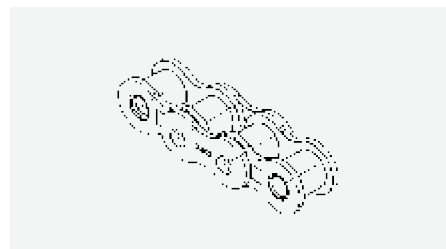

iwis® Roller chains

according to DIN 8187-1, ISO 606: 2004 and iwis standard

DIN ISO no.	Ref. no. iwis	Pitch p (")	Pitch p (mm)	iwis (N) ave.	Norm (N) min.	Bearing area F (cm²)	Weight per m q (kg/m)	Chain components and connecting links	b ₁ (mm) min.	b ₂ (mm) max.	g (mm) max.	a ₁ (mm) max. ²⁾	a (mm) max. ²⁾	Roller d (mm) max.	Pin d ₂ (mm) max.	Transverse pitch e (mm)
Duplex																
05 B-2	D 52	8"	8,00	9.100	7.800	0,22	0,36	2, 3, 8	3,16	4,85	7,10	13,90	15,00	5,00	2,31	5,64
06 B-2	D 67 ¹⁾ *	3/8"	9,525	20.000	16.900	0,56	0,78	2, 3, 6, 7, 8	5,72	8,53	8,20	23,40	24,60	6,35	3,31	10,24
08 B-2	D 85 SL*	1/2"	12,70	40.000	32.000	1,00	1,35	2, 3, 6, 7, 8	7,75	11,30	12,20	30,80	32,40	8,51	4,45	13,92
10 B-2	D 106 SL*	5/8"	15,875	56.000	44.500	1,34	1,85	2, 3, 6, 7, 8	9,65	13,28	14,40	36,00	37,50	10,16	5,08	16,59
12 B-2	D 127*	3/4"	19,05	68.000	57.800	1,78	2,50	2, 3, 6, 7, 8	11,75	15,62	16,40	42,10	43,00	12,07	5,72	19,46
16 B-2	D 1611*	1"	25,40	150.000	106.000	4,21	5,40	2, 3, 6, 7, 8	17,02	25,45	21,10	68,00	68,80	15,88	8,28	31,88
20 B-2	D 2012	1 1/4"	31,75	210.000	170.000	5,84	7,36	2, 4, 6, 8	19,56	29,01	25,40	79,70	82,90	19,05	10,19	36,45
24 B-2	D 2416	1 1/2"	38,10	370.000	280.000	11,00	13,85	2, 4, 6, 8	25,40	37,92	33,50	101,80	106,50	25,40	14,63	48,36
28 B-2	D 2819	1 3/4"	44,45	500.000	360.000	14,70	18,80	2, 4, 6, 8	30,95	46,58	37,00	124,70	129,20	27,94	15,90	59,56
32 B-2	D 3219	2"	50,80	530.000	450.000	16,10	19,80	2, 4, 6, 8	30,95	45,57	42,30	126,00	128,30	29,21	17,81	58,55
Triplex																
08 B-3	Tr 85*	1/2"	12,70	58.000	47.500	1,50	2,00	2, 3, 7, 8	7,75	11,30	12,20	44,70	46,30	8,51	4,45	13,92
10 B-3	Tr 106*	5/8"	15,875	80.000	66.700	2,02	2,80	2, 3, 7, 8	9,65	13,28	14,40	52,50	54,00	10,16	5,08	16,59
12 B-3	Tr 127*	3/4"	19,05	100.000	86.700	2,68	3,80	2, 3, 7, 8	11,75	15,62	16,40	61,50	62,50	12,07	5,72	19,46
16 B-3	Tr 1611*	1"	25,40	220.000	160.000	6,32	8,00	2, 3, 6, 7, 8	17,02	25,45	21,10	99,20	100,70	15,88	8,28	31,88
20 B-3	Tr 2012	1 1/4"	31,75	315.000	250.000	8,76	11,00	2, 4, 6, 8	19,56	29,01	25,40	116,10	119,40	19,05	10,19	36,45
24 B-3	Tr 2416	1 1/2"	38,10	560.000	425.000	16,50	20,31	2, 4, 6, 8	25,40	37,92	33,50	150,20	155,40	25,40	14,63	48,36
28 B-3	Tr 2819	1 3/4"	44,45	750.000	530.000	22,05	28,00	2, 4, 6, 8	30,95	46,58	37,00	184,60	188,90	27,94	15,90	59,56
32 B-3	Tr 3219	2"	50,80	795.000	670.000	24,15	29,60	2, 4, 6, 8	30,95	45,57	42,30	184,50	186,50	29,21	17,81	58,55

¹⁾ Straight side plate ²⁾ Varying dimensions for cranked links

The suffix SL indicates chains with particularly wear-resistant pins.

It should be noted that if cranked links are fitted, the breaking strength of the chain may be reduced by approximately 20%.

CHAIN COMPONENTS AND CONNECTING LINKS




Nr. 2 Inner links
Standard designation B



Nr. 3 Connecting link
with spring clip
Standard designation E



Nr. 4 Connecting link
with split pin fastening
Standard designation S



Nr. 6 Single cranked link
with split pin fastening
Standard designation L



Nr. 7 Double cranked links
Standard designation C



Nr. 8 Outer link
Standard designation A

iwis® Roller chains

according to DIN 8188-1, American standard, ISO 606: 2004


DIN ISO no.	Ref. no. iwis	ANSI Ref. no.	Pitch p (")	Pitch p (mm)	iwis (N) ave.	Norm (N) min.	Bearing area F (cm ²)	Weight per m q (kg/m)	Chain components and connecting links	b ₁ (mm) min.	b ₂ (mm) max.	g (mm) max.	a ₁ (mm) max. ²⁾	a (mm) max. ²⁾	Roller d ₁ (mm) max.	Pin d ₂ (mm) max.	Transverse pitch e (mm)
Simplex																	
08 A-1	L 85 A	ANSI 40	1/2"	12,70	18.000	14.100	0,44	0,60	2, 3, 6, 7, 8	7,94	11,15	12,00	16,60	17,50	7,95	3,96	–
10 A-1	M 106 A	ANSI 50	5/8"	15,875	29.000	22.200	0,70	1,00	2, 3, 6, 7, 8	9,53	13,84	14,40	20,40	21,70	10,16	5,08	–
12 A-1	M 128 A SL ¹⁾	ANSI 60	3/4"	19,05	42.000	31.800	1,06	1,47	2, 3, 4, 6, 7, 8	12,70	17,75	18,00	25,30	26,70	11,91	5,96	–
16 A-1	M 1610 A	ANSI 80	1"	25,40	68.000	56.700	1,79	2,57	2, 3, 4, 6, 7, 8	15,88	22,60	22,80	32,10	34,00	15,88	7,92	–
Duplex																	
08 A-2	D 85 A	ANSI 40-2	1/2"	12,70	36.000	28.200	0,88	1,19	2, 3, 4, 6, 7, 8	7,94	11,15	12,00	31,00	31,90	7,95	3,96	14,38
10 A-2	D 106 A	ANSI 50-2	5/8"	15,875	56.000	44.400	1,40	1,92	2, 3, 6, 7, 8	9,53	13,84	14,40	38,60	39,90	10,16	5,08	18,11
12 A-2	D 128 A ¹⁾	ANSI 60-2	3/4"	19,05	84.000	63.600	2,12	2,90	2, 3, 4, 6, 7, 8	12,70	17,75	18,00	48,10	49,50	11,91	5,96	22,78
16 A-2	D 1610 A	ANSI 80-2	1"	25,40	145.000	113.400	3,58	5,01	2, 3, 4, 6, 7, 8	15,88	22,60	22,80	61,40	63,30	15,88	7,92	29,29
Triplex																	
08 A-3	Tr 85 A	ANSI 40-3	1/2"	12,70	50.000	42.300	1,32	1,78	2, 3, 6, 7, 8	7,94	11,15	12,00	45,40	46,30	7,95	3,96	14,38
10 A-3	Tr 106 A	ANSI 50-3	5/8"	15,875	80.000	66.600	2,10	2,89	2, 3, 6, 7, 8	9,53	13,84	14,40	56,70	58,00	10,16	5,08	18,11
12 A-3	Tr 128 A	ANSI 60-3	3/4"	19,05	125.000	95.400	3,18	4,28	2, 3, 4, 6, 7, 8	12,70	17,75	18,00	71,00	72,30	11,91	5,96	22,78
16 A-3	Tr 1610 A	ANSI 80-3	1"	25,40	210.000	170.100	5,37	7,47	2, 3, 4, 6, 7, 8	15,88	22,60	22,80	90,70	92,70	15,88	7,92	29,29

iwis® Roller chains, double-pitch type

according to DIN 8181 and ISO 1275:1995

208 B	LR 165 SL	-	1"	25,40	22.000	18.000	0,50	0,52	2, 4, 6, 8	7,75	11,30	11,80	16,90	18,60	8,51	4,45	–
210 B	LR 206 SL	-	1 1/4"	31,75	28.000	22.400	0,67	0,63	2, 4, 6, 8	9,65	13,28	15,10	19,50	20,80	10,16	5,08	–
212 B	LR 247 SL	-	1 1/2"	38,10	34.000	29.000	0,89	0,85	2, 4, 6, 8	11,75	15,62	16,10	22,70	24,10	12,07	5,72	–
216 B	LR 3211	-	2"	50,80	75.000	60.000	2,10	2,10	2, 4, 6, 8	17,02	25,45	20,60	36,10	38,10	15,88	8,28	–

Roller Chains, double-pitch type

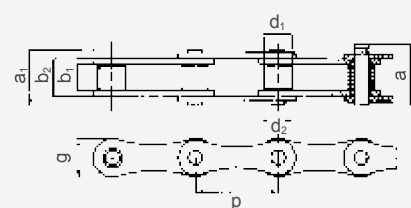

¹⁾ Also available with straight side plates ²⁾ Varying dimensions for cranked links

It should be noted that if cranked links are fitted, the breaking strength of the chain may be reduced by approximately 20%.

The suffix SL indicates chains with particularly wear-resistant pins.

iwis® High performance chains

Quality products with a world reputation

HIGH QUALITY IS BASED ON EACH INDIVIDUAL PART BEING TECHNICALLY PERFECT

- Use of high-grade heat-treatable steels which are made exclusively for iwis to their material analysis, tolerance and surface quality.
- Each chain part is manufactured a million times daily to the same precision. This production is monitored by SPC (statistical process control).
- All chain parts are heat-treated, using special processes to optimize quality features.
- Constant geometry and high surface quality result from the use of modern production technologies.
- Chains are checked for dimensional accuracy: length tolerance, freedom of articulation and assembly component integrity, inspection of the press-in seating of the pin outer links and bush-inner link interfaces.
- The high standard of quality assurance conforms with the high requirements of ISO 9001: 2006.
- For special applications
 - Surface coatings
 - Special lubrications
 - Reduced length tolerated chains
 - Special materials (e.g. corrosion resistant)

